

Model: **PRO2.0iS**

**Portable Generator**

# KOHLER®

**ISO 9001**  
KOHLER  
POWER SYSTEMS  
NATIONALLY REGISTERED



## The KOHLER Advantage

- **Built to Last Since 1920**

For over 90 years, hospitals, airports and military bases around the world have depended on KOHLER generators.

- **Premium Warranty**

You get our premium 3-year limited warranty backed by a network of more than 10,000 dealers.

- **Custom Kits**

Legs, handles, wheels, lifting kits - whatever you want, any way you want it.

- **Free Loaner Program\***

If your KOHLER generator ever goes down, just swing by one of our select dealers. We'll provide a free loaner unit for warranty repairs exceeding 24 hours.

## Standard Features

- **Light, Compact Design**

At 44.1 pounds with a footprint of 19.2 x 11 inches, the PRO2.0iS is one of the lightest 2 kW inverter generators.

- **Parallel-Capable**

Double your power output when you use the parallel kit with two identical PRO2.0iS portable generators.

- **Smart, Clean Power**

Senses power demand and produces only the needed power, saving fuel and reducing exhaust gases and wear and tear for long product life.

- **Inverter Technology**

Output current safely powers sensitive electronics.


- **Extra Engine Protection**

Oil Sentry™ automatically shuts engine down in low-oil conditions.

- **Quiet Operation**

Enclosed design combined with demand-based operation provides quiet power.

## Control Panel

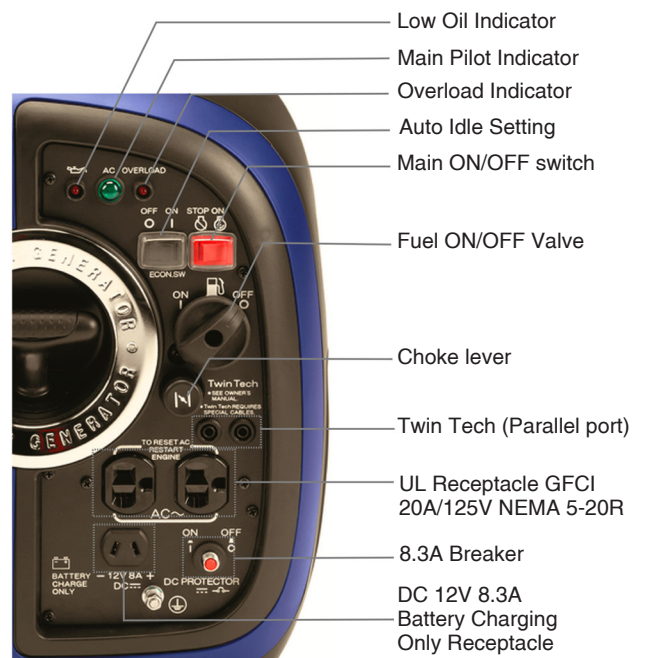

\* At participating dealers, based on availability.

## Specifications



Model Name	PRO2.0iS
Model spec	PA-PRO20iS-3001 PA-PRO20iS-1001
Compliance	3001 (EPA/CARB) 1001 (CSA)
AC rated output (running watts)	1,600
AC maximum output (motor starting watts)	2,000
AC voltage	120
AC frequency (Hz)	60
Total Harmonic Distortion	≤ 5%
Rated AC amperage	13.3
Max rated amperage	16.7
Engine displacement	79cc
Fuel type	Gasoline
Engine RPM	3000-4500
Recommended oil	4-Stroke Engine Oil API Service Classification SE Type or Higher
Automatic voltage regulation	Yes
Choke location	On Control Panel
Fuel shut off	On Control Panel
Starting method	Recoil Only
Low oil shutdown method	Low Level
Neutral	Neutral Bonded to Frame
Start switch type	Toggle Type Off-On (Red)
Switch location	On Control Panel
Fuel gauge	Yes
Fuel tank capacity	1.1 gal/4.1 liters
Run time @ 50% (hours)	7.9
Warranty - Residential	3 Years (USA ONLY)
Warranty - Commercial	3 Years (USA ONLY)
Warranty -	1 Year ( Colombia)

## Available Options

- Parallel Kit

## Generator Set Dimensions and Weights

A mm (in.):	490 (19.3)	Carton Length mm (in.):	555 (21.8)
B mm (in.):	280 (11)	Carton Width mm (in.):	365 (14.4)
C mm (in.):	455 (18)	Carton Height mm (in.):	495 (19.5)
Unit Weight lbs (kg):	44 (20)	Shipping Weight lbs (kg):	49 (22)



NOTE: Dimensions are provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

## DISTRIBUTED BY:

LISTER PETTER DIESEL S.A.S.  
 CARRERA 53 No. 15-30  
 TELS: (1) 4200277 / 405 0607 CEL: 310+3048382  
 BOGOTA - COLOMBIA  
[ventas@listerpetter.com.co](mailto:ventas@listerpetter.com.co)  
[repuestos@listerpetter.com.co](mailto:repuestos@listerpetter.com.co)  
 Mayo 2015

© 2014 by Kohler Co. All rights reserved.